


80D-9Some of the photos may include optional equipment.

Your satisfaction is our priority.

Proven Performance. Innovative Design. **Hyundai 9 Series Diesel Mid-Size Forklift.**

The Hyundai 9 Series diesel forklifts deliver comfortable operation, increased productivity, and ease of maintenance.

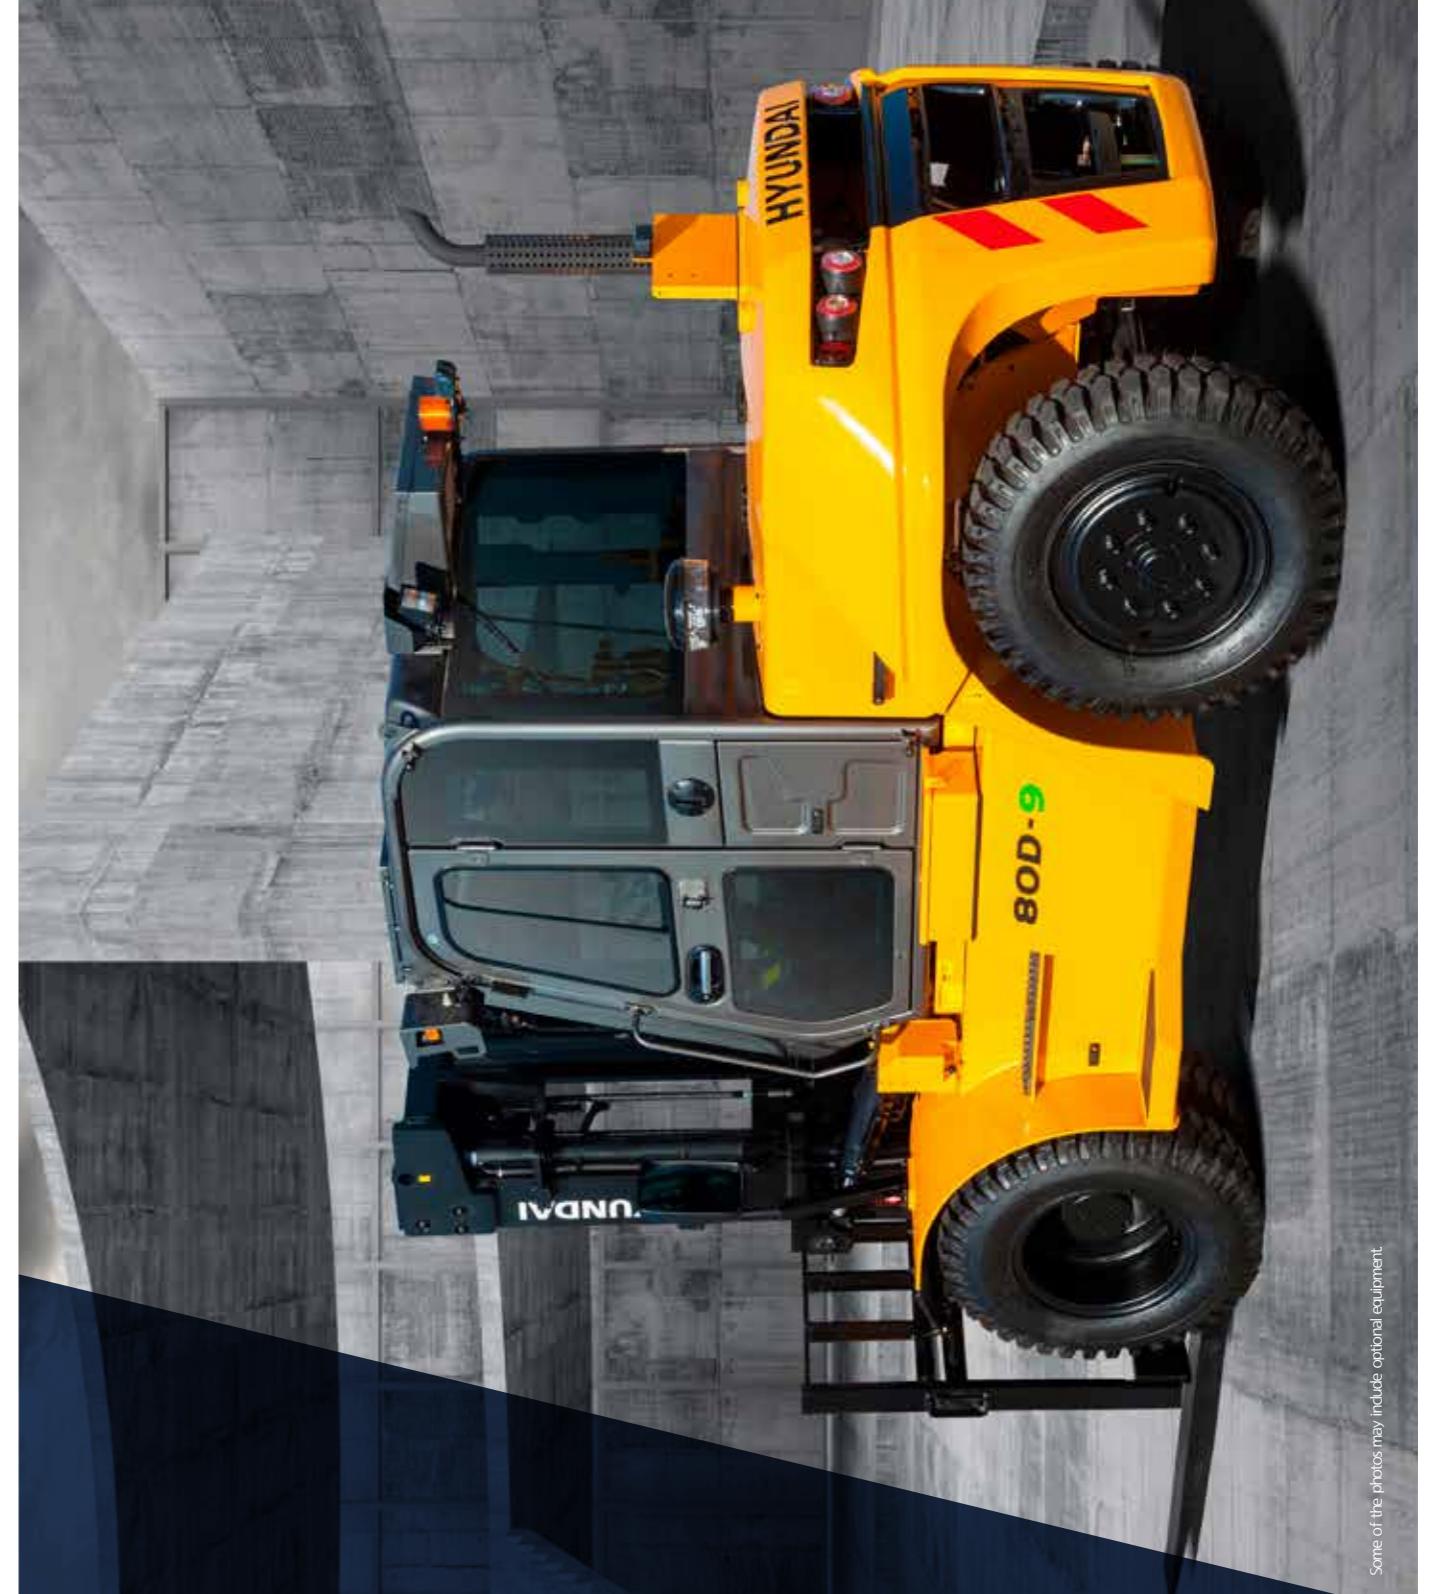

- Powerful Performance
- Spacious Operator's Compartment
- Heated Grammer™ Suspension Seat
- Electric Parking Brake : Parking brake operates automatically when the operator leaves the seat
- 4.3 inch LCD Color Monitor
- Machine Indication Warning System
- Speed Limit Settings
- Operator Presence Sensing System (OPSS)
- Full Automatic Temperature Control (FATC)
- Heat and A/C

Power & Performance

36 Highly Efficient, Optimized Performance

A powerful engine and advanced technology systems provide you with enhanced performance and increased productivity.

38



Powerful and economical Cummins QSF3.8 engine!

The adoption of a 4-cylinder Turbo Charged Cummins QSF3.8 engine ensures low vibration and improves cold weather performance. The combination of a direct injection fuel system, variable geometry turbo, and a cooled EGR system provides increased fuel economy and performance. Diesel Oxidation Catalyst (DOC) and Selective Catalytic Reduction (SCR) emission systems have been installed to meet Tier 4 emission standards without the use of a Diesel particulate Filter. (Requires diesel exhaust fluid.)



ZF Fully-Automatic Transmission

Incorporating a heavy-duty, planetary final reduction type DIC drive axle independent of the transmission ensures low vibration and ease of maintenance. Wet disc type brakes with a high flow brake oil cooler provide consistant braking and a virtually maintenance-free brake system.



Drive Axle & Wet Disc Brakes



Fully Hydraulic Power Steering

The hydraulic steering system guarantees smooth and flexible steering, preventing over-run and kick-back.



Excellent gradeability and travel speed

The powerful engine provides greater acceleration, better gradability and faster travel speed on tough terrains or slopes.

100.6 hp / 2,200 rpm
306 ft-lb / 1,600 rpm



Max. Travel Speed (Unloaded)


Prompt and Safe Loading/Unloading
The 68.6 cc, large capacity, tandem-type hydraulic pump, powerful engine torque of 306 ft-lb, and optimized weight distribution on the front and rear wheel axles, provide prompt, safe, and efficient loading/unloading

Mast Tilting Angle
With a mast tilting angle of 15 degrees forward and 10 degrees backward the operator has the ability to load and unload a wide range of products safely and rapidly.

Operator Comfort

Extraordinary Convenience, Optimized Ergonomics

The ergonomically designed cabin provides full support and comfort to the operator.

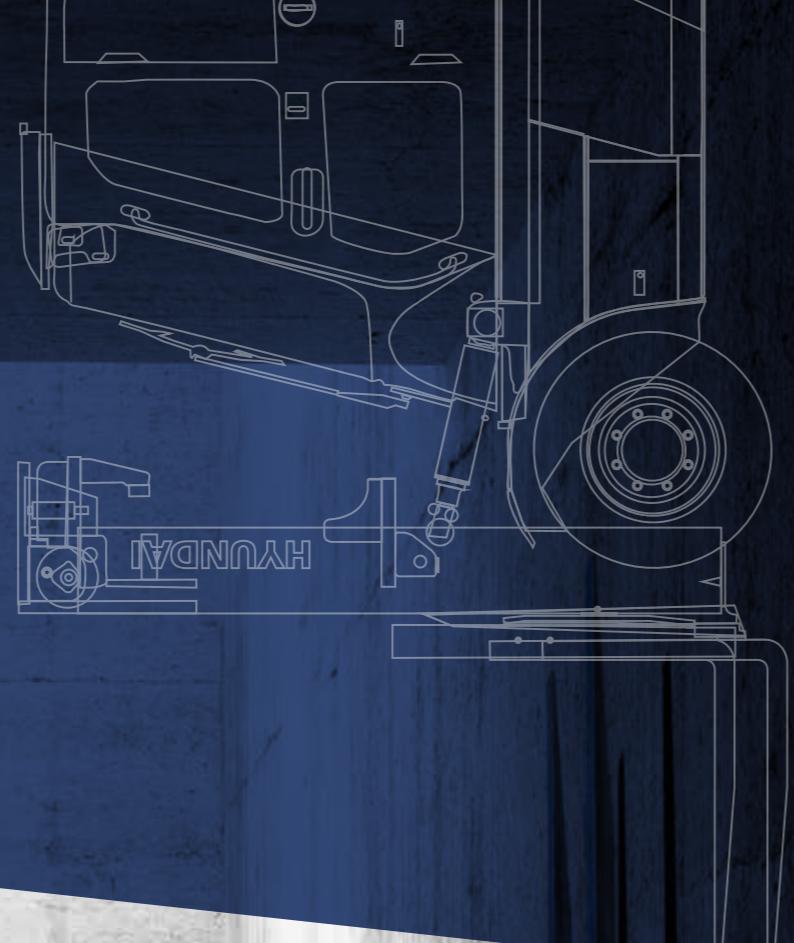

COMFORTABLE WORKSPACE




Some of the photos may include optional equipment.

Ergonomic Operator's Cabin

The roomy, ergonomic cabin was designed to increase productivity, field of view, and operator comfort. The smooth lever and pedal operation, telescopic tilt steering column, suspension seat, and deluxe cabin provide comfortable and efficient operation.



Some of the photos may include optional equipment.

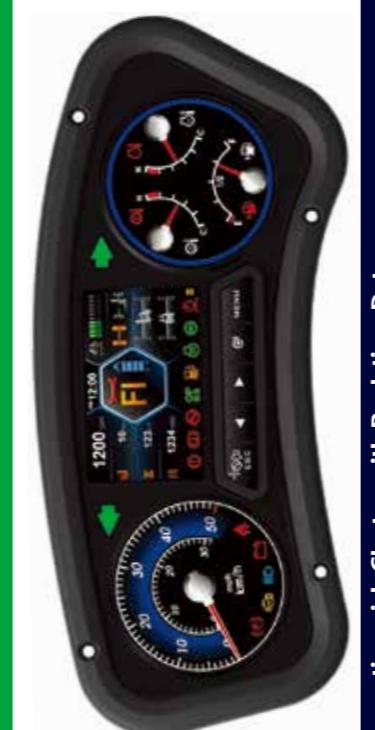

Information-rich Cluster with Real-time Data

- Odometer
- Engine Rpm
- Mast Tilt Indicator
- Fuel Gauge
- High Beam Indicator Lamp
- Transmission Oil Temperature Gauge
- Fuel Heater Operation Lamp
- Fuel Cleaner Filter Warning Light
- Hour Meter
- Diesel Exhaust Fluid Level
- Warning Light
- T/M Information Display
- Parking Brake Warning Lamp
- Battery Charging Warning Light
- Consumable Replacement Display Lamp
- Air Cleaner Filter Warning Light
- Load Weight Indicator (OPT)
- Grade And Slope Display
- Engine Coolant Temperature Gauge
- Engine Check Warning Light
- Seat Belt Warning Lamp
- OPSS Lamp
- Inchng Display Lamp
- Inchng Display Lamp



High-Output Air Conditioner & Heater

The air-conditioner automatically adjusts and maintains the cabin to the selected temperature and provides a more comfortable working environment for the operator.



Adjustable Steering Wheel

The telescoping steering wheel is fully adjustable to adapt to the operator reducing fatigue while increasing comfort, control, and productivity.



Grammer™ Seat (OPT)

The ergonomically designed, easily adjustable suspension seat, reduces operator fatigue and provides greater comfort.
• Operator's weight range (99-375 lbs)
• ELR (Emergency Locking Retractor) type seat belt is standard
• Heated seat and headrest (OPT)



Accelerator and Inching Pedals

The thick, high-quality floor mat and ergonomically placed control pedals reduce operator fatigue and drastically improve productivity.



Quick Response Control Levers

Responsive levers with an advanced hydraulic system allow precise handling and excellence performance. Comes with a standard 5-level/6-function system or an optional 7-function system.




Centralized Instrument Panel

Various switches can be concentrated on the right side of the driver's seat to quickly optimize the vehicle condition to suit the working environment.

Safe & Secure

Excellent visibility, Advanced safety

The operator's cabin was designed with careful consideration of visibility, safety, comfort and productivity.

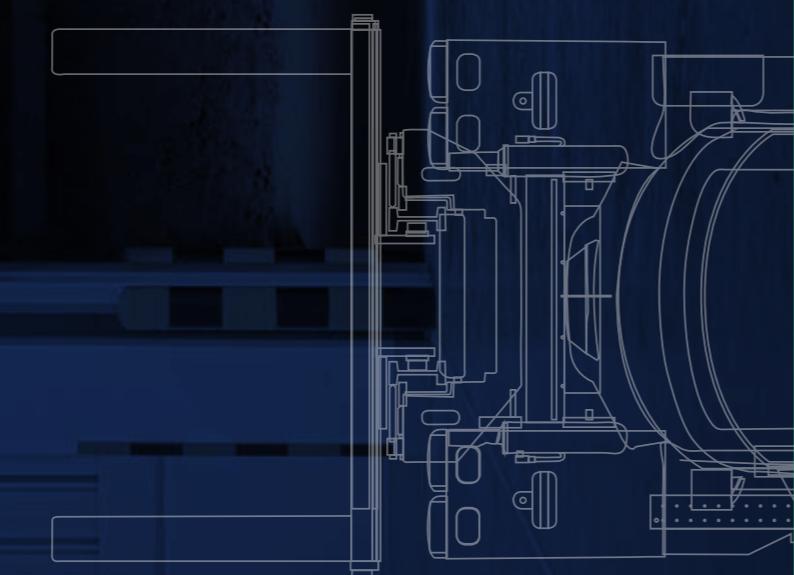

Excellent Visibility for Safe Operation

Optimized lift cylinder arrangement provides the operator with wider visibility. A standard rearview camera and monitor, along with a panoramic mirror, expand the operator's rear view.

Safety Features

Speed Limit Setting
Adjustable max travel speeds from 6 mph (10 km/h) to 22 mph (35 km/h) provide the ability to match the 80D-9's travel speeds to the present work conditions.

Password Setting Function

The password function on the cluster can store up to ten passwords, preventing unauthorized personnel from starting and operating the forklift, reducing the risk of accidents, damage, and theft of the forklift.

Auto Parking Brake

If the operator leaves the seat while the gear selector is in neutral, the parking brake is automatically engaged to secure the forklift from unintended travel, and released upon the operator's return to the seat.



Load Weight Indicator (OPT)
The optional load indicator displays load weight and prompts a warning on the cluster when exceeding max capacity reminding the operator of safe operational limits. (Not for legal trade)


Rear Tire Cover (STD) / Under Cover (OPT)

The Rear Tire Cover helps prevent foreign materials from entering the engine compartment through the steer axle wheel wells. The Under Cover protects components in the engine compartment from excessive dust and debris entering from underneath the forklift.



Safety Features


A standard rearview camera, highly sensitive sensors, and an advanced safety system assure safe operation in the most demanding of work environments.

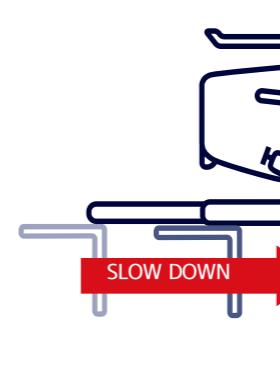

Fork Safety Features
In the case of sudden damage to a hydraulic line, the down-safety valve prevents the load from falling, while a down-control valve maintains a controlled descent speed.



Machine Indication Warning System
Grade and slope sensors built into the MCU provide grade and slope information independently on the cluster. Should the maximum safe operating parameters be exceeded, a warning is emitted to alert the operator.

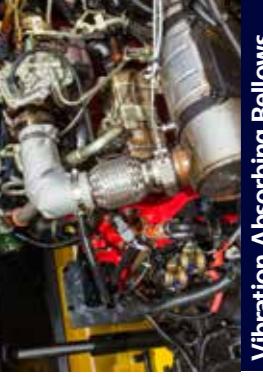


Vibration Absorbing Bellows
The durability of the muffler and the exhaust pipe is improved by the use of vibration absorbing bellows in the exhaust pipe connecting the engine exhaust manifold and the muffler.



High Intensity LED Headlamps & LED taillights
High intensity LED headlamps and semi-permanent taillight assemblies improve work efficiency and safety.



Large Step Plates & Grab Handles
Wide, long Step Plates and ample grab handles offer three points of contact for easy and safe entry and exit of the operator's cabin.

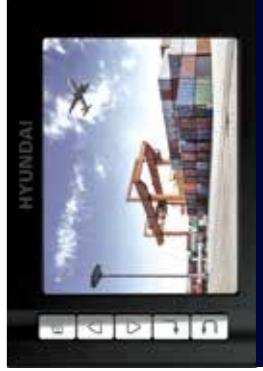


Rearview Camera (OPT)
The reverse actuated rearview camera and monitor add visibility, providing for a safer work environment.

Maintenance & Convenience

Cutting Servicing Downtime

An ideal arrangement of components ensures easy access and convenience for maintenance.

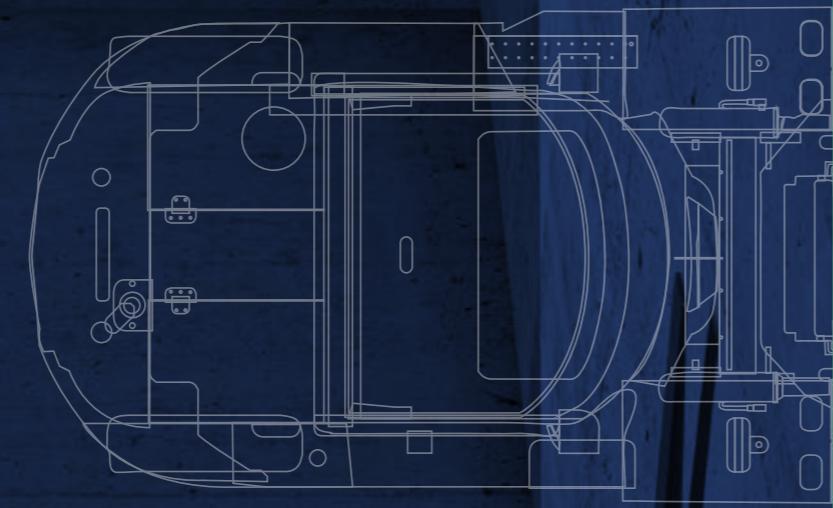

Some of the photos may include optional equipment.

Fully Opening Tilt Cabin and Hood

The cab tilt system has an electrically assisted hydraulically actuated cylinder that tilts the cab creating unparalleled access.

Item	Interval	Elapsed Count	Alarm
Oil Gear Oil	500	1	0
Transmission Oil F...	100	1	0
Hydraulic Tank Al...	100	1	0
Engine Oil	250	1	0
Air Cleaner Element	500	1	0

Maintenance Management
The replacement schedule of consumable items can be tracked via the cluster, preventing performance issues or damage due to a lack of maintenance.



Easy Battery Check
Batteries are installed under the left-side step of the forklift to ensure convenient and easy access.



Improved Serviceability
Adoption of one-touch latches make for easy access to service the driveline components and electric parts.

Fuse Box and Relay Box
The cabin is fitted with an easily accessible fuse and relay box with a waterproof and dustproof cover for ease of maintenance.



Easy-to-Fill Diesel Exhaust Fluid
Diesel Exhaust Fluid inlet can be easily accessed for convenient refills.



Easy-to-Access Washer Tank
Washer fluid can be checked and topped off by simply opening the winged engine cover.



Lockable Fuel Cap (OPT)
A locking fuel cap has been installed to prevent theft of fuel or equipment malfunction due to foreign materials.



Cabin Tilting switch
The cabin can be tilted up to 42.5 degrees with a single switch, making it easy to service the components located under the operator's cabin.

80D-9 Series

80D-9

Hi-MATE, a solution for field control based on data

Continuous monitoring of the data collected from sensors and modules installed on the forklift during daily use are provided to the mobile device or computer of the customer or designated dealer in real time through Hyundai Construction Equipment's server. Such data can be used for establishing a control plan for safety in the field, productivity improvement, service intervals, and cost savings. Allowing your business to operate smarter and achieve your goals.



Equipment operation management

- * Real-time monitoring and follow-up management of individual vehicles, drivers, equipment on-site, and operation information
 - Key-on time, travel hours, work hours, and traveling position



Equipment status management

- * Supplying vital self-diagnostics information about forklift linked with operation hour, helping to establish a service management plan
 - Indicating fuel remainder, failure information and consumable exchange timing and service intervals



Safe traveling control



- * Provides alerts allowing for accountability and follow-up management of safety incidents caused by collisions involving the forklift during operation
 - Records number and severity of impacts



Human resource management

- * Checking and follow-up management such as matching between self-diagnostics and equipment conditions before operation
 - Driver authorization, self-diagnostics of equipment conditions

Data Flow

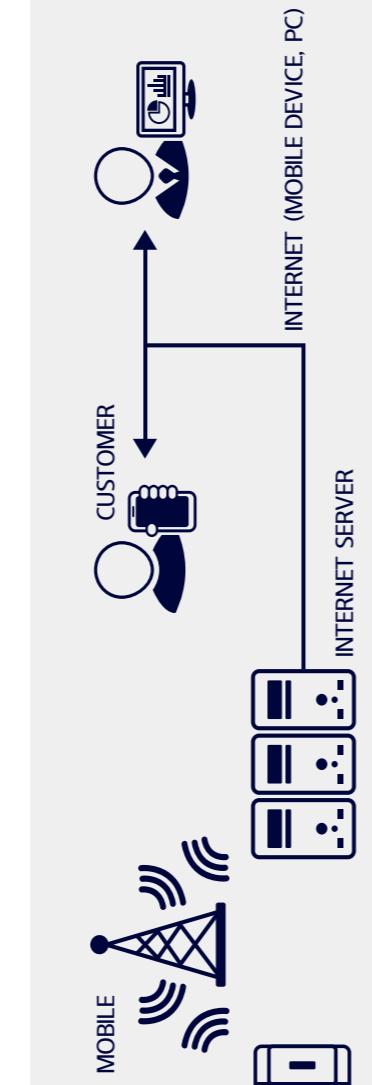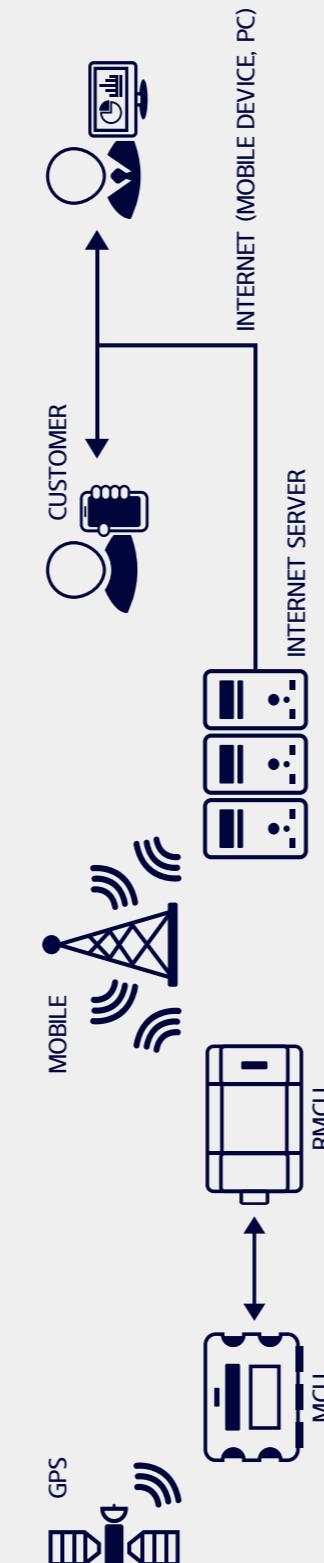

New 9 Series Mast Specification

80D-9 Shaft Type Fork & Carriage

Mast Type	Maximum Fork Lift Height in	Overall Height (Fork Lowered) in	Maximum Height in	Free lift height (with backrest) in	Tilt Angle deg	Fwd Bwd deg	Load Capacity (24in LC) lbs	Truck Weight lbs
V270	1079	99.4	160.4	5.9	15	10	17500	25,691
※V300	1197	105.3	172.2	5.9	15	10	17500	25,797
V320	1315	111.2	184.1	5.9	15	10	17500	25,907
V350	1394	115.2	191.9	5.9	15	10	17500	25,978
V370	1472	119.1	199.8	5.9	15	10	17500	26,051
2-Stage Limited free lift	V400	1591	125.0	211.6	5.9	15	10	17500
V450	178.7	136.8	231.3	5.9	15	10	17500	26,157
V500	198.4	146.7	251.0	5.9	15	10	17500	26,305
V550	218.1	165.5	270.7	5.9	15	10	17500	27,233
V600	237.8	166.3	290.4	5.9	15	10	17420	27,166
V700	277.2	186.0	329.7	5.9	15	10	17420	27,166
V750	296.9	195.9	349.4	5.9	15	6	16,097	27,793
3-Stage full freelift	TF/T5450	1799	108.3	232.5	55.7	15	6	17,500
TF/T5500	199.6	116.1	252.2	63.8	15	10	17,500	27,488
TF/T5550	219.3	124.0	271.9	71.5	15	10	17,500	27,716
TF/T5600	239.0	131.9	291.5	79.3	15	10	17,200	27,940


※ : Standard

80D-9 Hook Type Fork & Carriage

Mast Type	Maximum Fork Lift Height in	Overall Height (Fork Lowered) in	Maximum Height in	Free lift height w/o backrest in	Free lift height w/o backrest in	Maximum height in	Free lift height w/o backrest in	Free lift height w/o backrest in	Tilt Angle deg	Fwd Bwd deg	Load Capacity (24in LC) lbs	Truck Weight kg
V270	1079	99.4	159.3	159.4	5.9	15	10	17,500	25,724			
※V300	1197	105.3	171.2	171.3	5.9	15	10	17,500	25,830			
V330	1315	111.2	183.0	183.1	5.9	15	10	17,500	25,943			
V350	1394	115.2	190.9	191.0	5.9	15	10	17,500	26,011			
V370	1472	119.1	198.7	198.8	5.9	15	10	17,500	26,084			
2-Stage Limited free lift	V400	1591	125.0	210.6	210.7	5.9	15	10	17,500	26,190		
V450	178.7	136.8	136.8	230.2	230.3	5.9	15	10	17,500	26,657		
V500	198.4	146.7	146.7	249.9	250.0	5.9	15	10	17,500	26,838		
V550	218.1	165.5	165.5	269.6	269.7	5.9	15	10	17,500	27,166		
V600	237.8	166.3	289.3	289.4	5.9	15	10	17,420	27,200			
V700	277.2	186.0	328.7	328.8	5.9	15	10	16,538	27,641			
V750	296.9	195.9	348.3	348.4	5.9	15	6	16,097	27,826			
TF/T5450	1799	108.3	232.4	231.5	55.8	15	6	17,500	27,294			
TF/T5500	199.6	116.1	252.0	251.2	63.7	15	10	17,500	27,521			
TF/T5550	219.3	124.0	271.7	270.9	71.6	15	10	17,500	27,749			
TF/T5600	239.0	131.9	291.4	290.6	80.3	15	10	17,200	27,974			

New 9 Series

80D-9

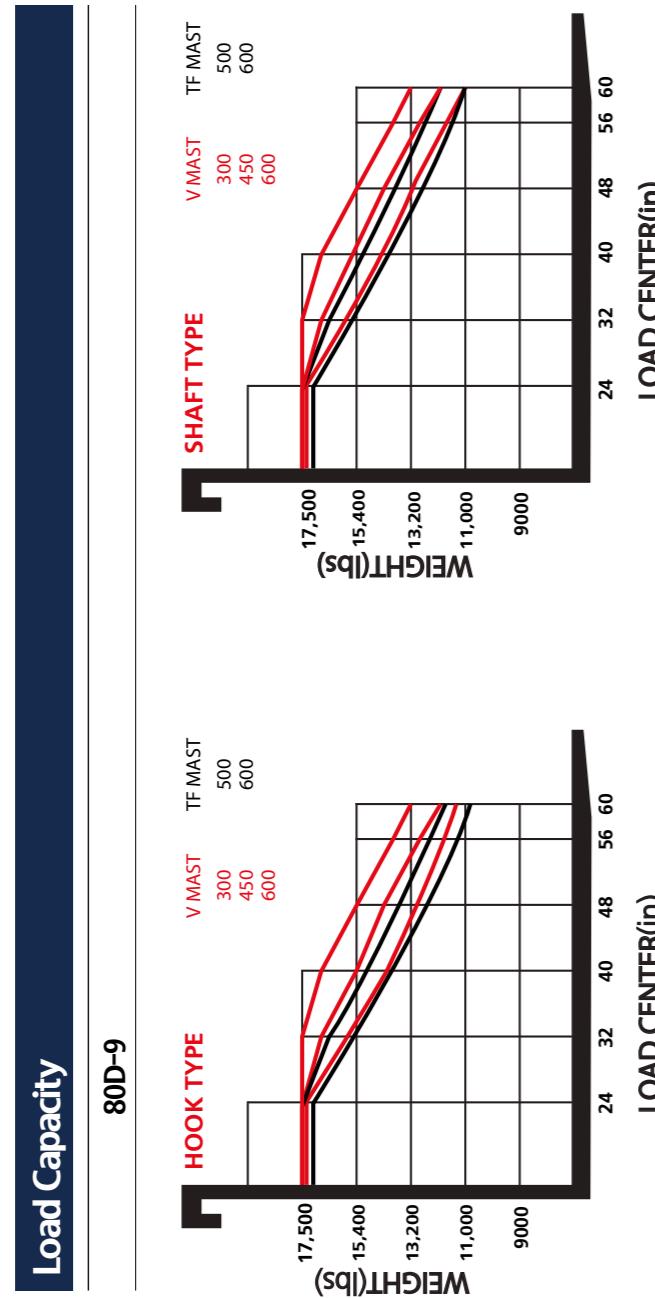

Optional Items

- Fork (in) 80D-9 : 47.2(STD), 53.2, 59.1, 70.9, 78.8, 84.7, 86.6, 94.5
- TIRE : Solid / Non-marking
- M.C.V : 2/3/4/5 spool (4 spool: standard)
- Rear view camera
- One-piece side shift carriage, one-piece side shift + fork positioner carriage
- 80D-9 hook-type carriage, one-piece shaft-type carriage
- Seat : Grammer heated wire + headrest seat
- OHG (A/C, Heater)
- Master switch
- Undercover
- LED warning light (Amber)
- TOP WIPER

* All specifications and photos in this catalog are subject to change for quality improvement.

Specification

Distinguishing mark

1.1 Manufacturer	Hyundai
1.2 Manufacturer's type designation	80D-9
1.3 Drive	Diesel
1.4 Type of operation	Seat type
1.5 Load capacity	17,500 (8,000)
1.6 Load center distance	lbs (kg) c in (mm) x in (mm)
1.8 Load center distance	24 (600) 27 (690)
1.9 Wheelbase	y in (mm) 98.4 (2,500)

Weight

21 Service weight	lbs (kg) 25,794 (11,700)
22 Axle loading, loaded front/rear	lbs (kg) 38,047 (17,258) / 5383 (2,442)
23 Axle loading, unloaded front/rear	lbs (kg) 11,309 (5,130) / 14,484 (6,570)

Tires, chassis

31 Tires : Pneumatic (P) Solid rubber (V), Non marking (N)	P
32 Tire size, front ($\varnothing \times$ width)	9,00-20-14PR
33 Tire size, rear ($\varnothing \times$ width)	9,00-20-14PR

Dimensions

35 Wheels, number front / rear (x = drive wheels)	4 x / 2
3.6 Tread, front	in (mm) 64.3 (1,632)
3.7 Tread, rear	in (mm) 67 (1,700)
41 Tilt angle forward / backward	deg 15 / 10
42 Height, mast lowered	h1 in (mm) 105.3 (2,675)
43 Free lift	h2 in (mm) 5.7 (145)
4.4 Lift height	h3 in (mm) 119.7 (3,040)
4.5 Height, mast extended	h4 in (mm) 172.3 (4,375)
47 Height of head guard (cabin)	h5 in (mm) 104.3 (2,649)
48 Seat height	h7 in (mm) 65 (1,650)
4.12 Coupling height	h10 in (mm) 20 (508)
4.19 Overall length	l1 in (mm) 203.6 (5,171)
4.20 Length to face of forks	l2 in (mm) 156.3 (3,971)
4.21 Overall width	b1 in (mm) 89.3 (2,268)
4.22 Fork dimensions ($l \times w \times t$)	$l \times e \times s$ in (mm) $(1,200 \times 180 \times 10)$
4.23 Fork carriage iso 2328	Class IV
4.24 Fork carriage width	b3 in (mm) 89.7 (2,277)
4.31 Ground clearance, below mast,	m1 in (mm) 9.9 (250)
4.32 Ground clearance, center of vehicle	m2 in (mm) 11.9 (302)
4.33 Cross-passage width (palet 1000x1200)	Ast in (mm) 220.1 (5,590)
4.34 Aisle width of pallets 800 x 1200 crossways (w x l)	A st in (mm) 228 (5,790)
4.35 Turning radius	Wa in (mm) 145.7 (3,700)
4.36 Smallest pivot point distance	b10 in (mm) 53.3 (1,354)


New 9 Series

Performance data	
5.1 Travel speed, unloaded	mph (km/h) 22 (35)
5.2 Fork lift speed, loaded / unloaded	in/s (mm/s) 15.4 / 17.7 (390 / 450)
5.3 Fork descending speed, loaded / unloaded	in/s (mm/s) 19.7 / 19.7 (500 / 500)
5.5 Max drawbar pull, loaded	lbf (kgf) 15,955 (7,237)
5.7 Gradeability, loaded	% 36.3
5.10 Service brake	Hydraulic
7.1 Manufacturer/model name	CUMMINS / QSF38
7.2 Rated power	hp (ps) / rpm 100.6 (102) / 2,200
7.3 Max torque	lbf (kgm) / rpm 306 (42.3) / 1,800
7.4 Number of cylinders / displacement	EA / cc 4 / 3,726
75 Fuel tank capacity	gal (l) 45.2 (17.5)

Additional data

8.2 Max hydraulic pressure (system / attachment)	bar 100.6 (102)
8.3 Attachment oil flow rate	gal (l) 30 (115)

Dimension

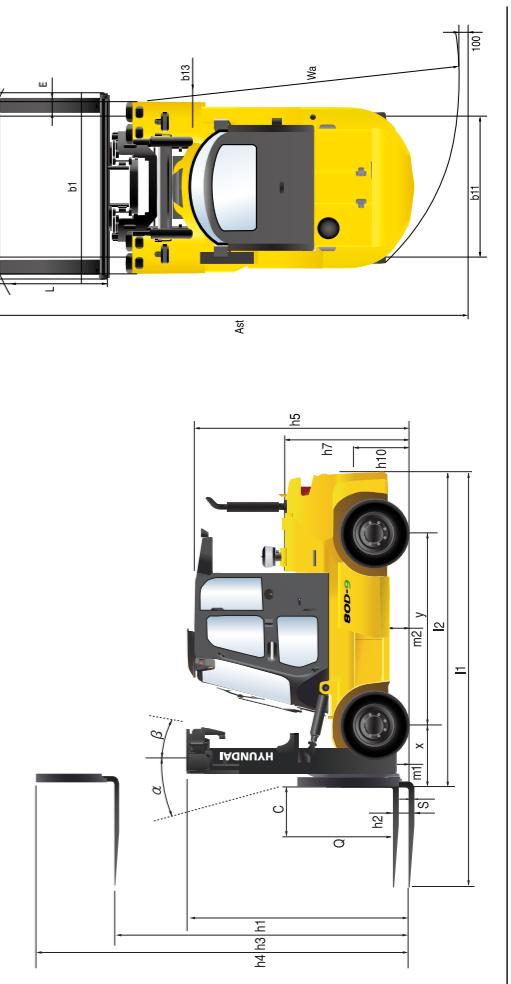

* All specifications in this catalog are subject to change according to the optional items.